

Model 460SJ

TELESCOPIC BOOM LIFTS

Performance


- Working Height 16.09 m
- Working Outreach 12.72 m
- Swing 360 Degrees Continuous
- Platform Capacity 270 kg
- Platform Rotator 180 Degrees Hydraulic
- Dimensions:
 - A. Platform Size 0.91 m x 1.83 m
 - B. Overall Width 2.31 m
 - C. Tailswing (working condition) 0.86 m
 - D. Stowed Height 2.47 m
 - E. Stowed Length 8.91 m
 - F. Wheelbase 2.37 m
 - G. Ground Clearance 0.30 m
- Range of Articulation 130 Degrees (+70, -60)
- Weight ^{1/2} 7,975 kg
- Max. Ground Bearing Pressure ² 4.85 kg/cm²
- Drive Speed 7.2 km/h
- Gradeability 45%
- Turning Radius
 - Inside 2.0 m
 - Outside 4.84 m

¹ Certain options or country standards may increase weight and/or dimensions


² With Standard tires



Reach Diagram

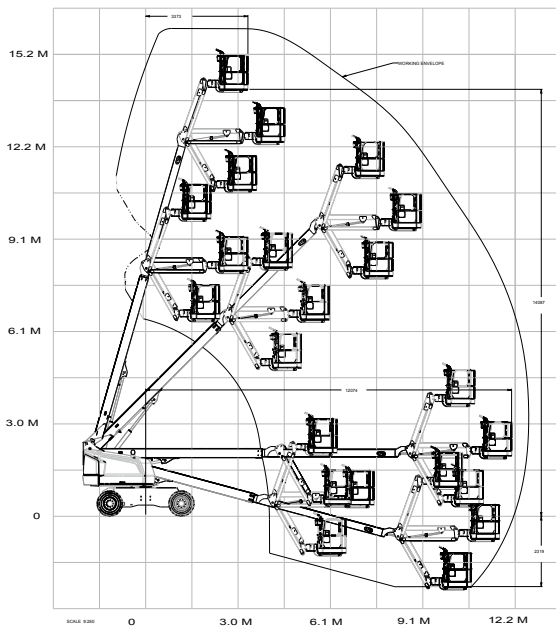

Dimensions

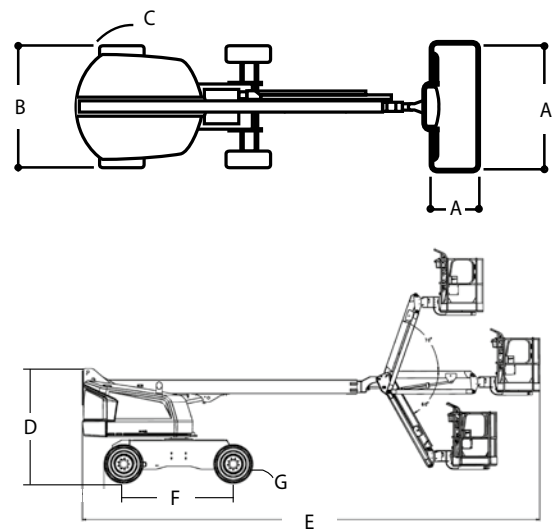

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company