

CORRUGATED SHEET SCREW A2/H



APPLICATION




SPECIFICATION


- 1 Head style 5/16" (8 mm)
- EPDM with SS washer 25 mm
- 3 Thread for substructure wood
- Orilling point Type A

3

SECTION

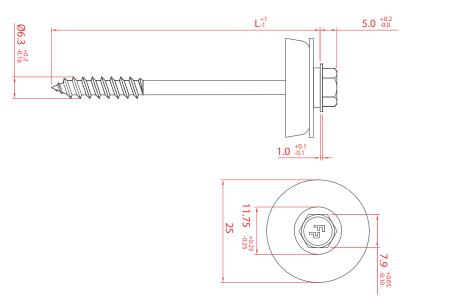



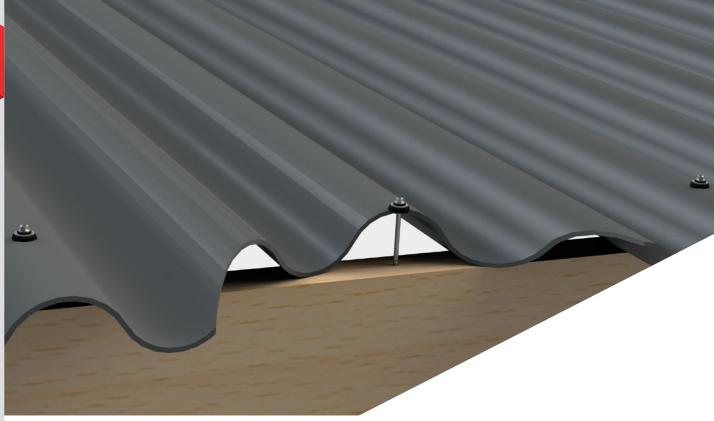

ORDER INFORMATION

| Product | Description | Size | EPDM | Packaging | Article code |
|------------------------|-----------------|--------------|-------|-------------|---------------|
| Corrugated Sheet Screw | SS A2 304, A2/H | 7,0 x 120 mm | 25 mm | 100 pcs/box | 1502087012025 |
| Corrugated Sheet Screw | SS A2 304, A2/H | 7,0 x 120 mm | 32 mm | 100 pcs/box | 1502087012032 |



CORRUGATED SHEET SCREW A2/H



CORRUGATED SHEET SCREW A2/H 7,0 x L - DP2

| Materials | | | | | |
|---------------------------------------|---|----------------------|--|--|--|
| Screw | Stainless steel 1.4301 (A2) – conform EN ISO 3506 | | | | |
| Washer | Stainless steel 1.4301 (A2) – conform EN ISO 3506 | QUALITY CONFIRMED | | | |
| Material A (t _I) | Steel Quality S280GD, S320GD and S350GD - conform EN 10346 | | | | |
| Material B (t _{II}) | Steel Quality S235 – conform 10025-2 and S280GD, S320GD and S350GD - conform EN 10346 | | | | |
| Drilling capacity | Wood | | | | |





| | | t _{N1} [mm] | L _{eff} [mm] | |
|-----------------------|------|----------------------|-----------------------|--|
| | | | 36 | |
| N _{R.k} [KN] | [KN] | Eternit Ecolor | 1,28 | |
| | Z | SVK Neptunus | 1,90 | |

Note

1. Above mentioned values are based on the technical approvals of the corrugated sheet producer. Limitations and application according the mentiond technical approval.

CERTIFICATES

