




# CORRUGATED SHEET SELF-DRILLING SCREW DP5

## APPLICATION




Bi-metal A2 304

Corrugated Sheet


Steel 6 Ga to 3/8"

## SPECIFICATION


- 1 Head style 5/16"
- 2 EPDM with SS washer 31/32"
- 3 Wings to enlarge drilling hole in corrugated sheet
- 4 Thread for substructure steel 6 Ga to 3/8"
- 5 Drilling point 5 (hardened steel)

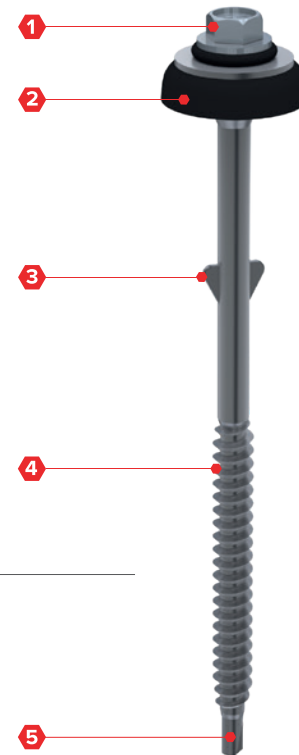

## CROSS SECTION

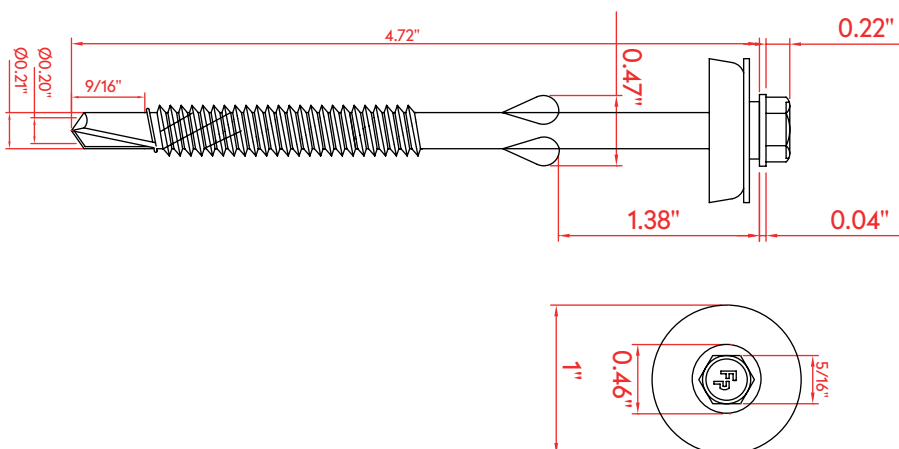

CORRUGATED SHEETS - STEEL 6 GA TO 3/8" - BI-METAL A2 304

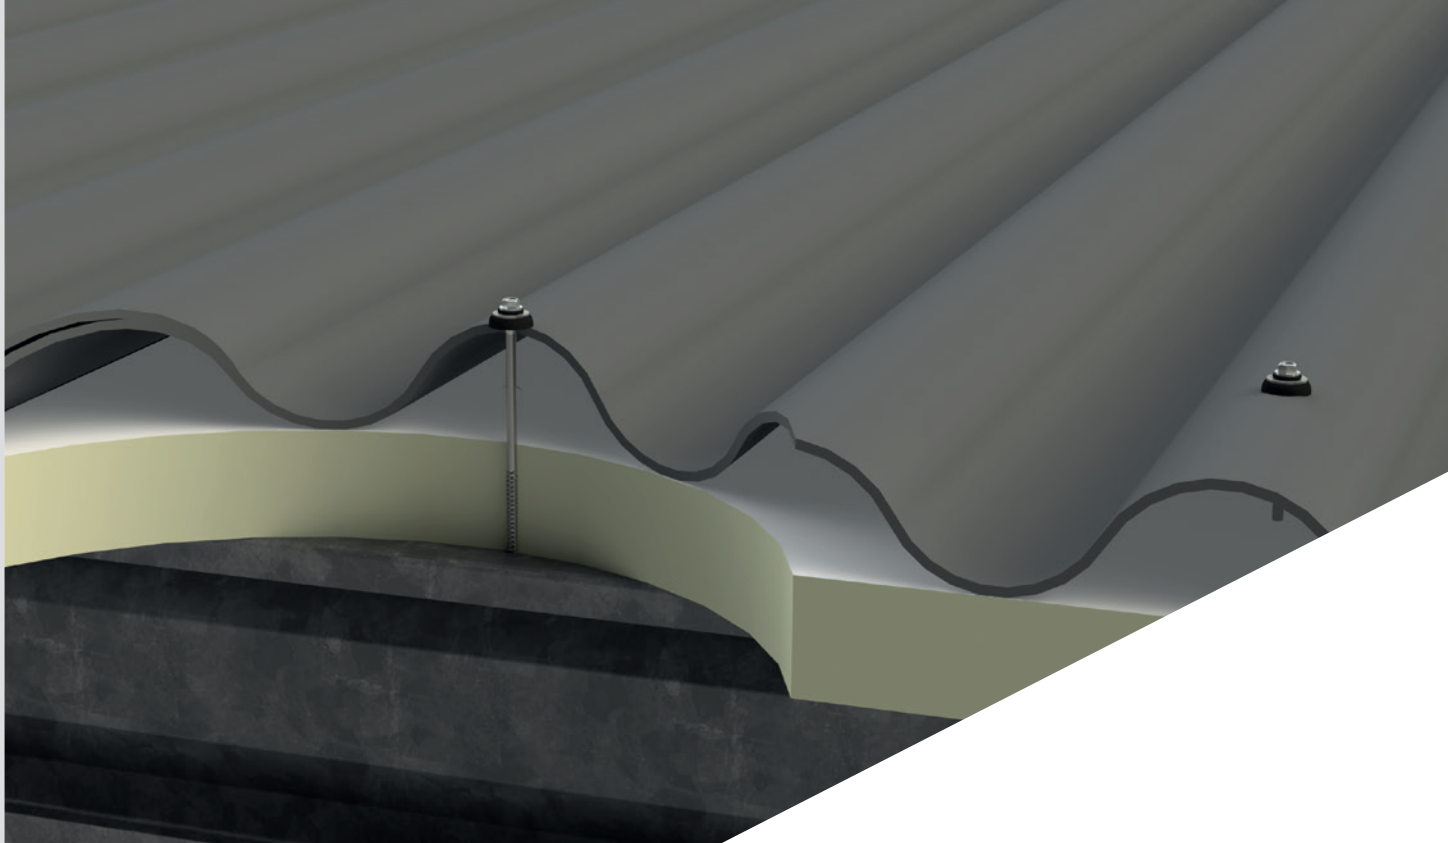

## APPLICATION

By using the below table, you can easily determine the required screw length.

Size	Insulation thickness (inch)													Article code
	25/32"	1 9/16"	2 11/32"	3 1/8"	3 15/16"	4 23/32"	5 1/2"	6 9/32"	7 1/16"	7 7/8"	8 21/32"	9 7/16"	10 7/32"	11
#12 x 4 5/8"	Without insulation													1501056312025

## ORDER INFORMATION

Product	Description	Size	EPDM	Packaging	Article code
Corrugated Sheet Screw	Bi-metal A2 304, DP5	#12 x 4 5/8"	31/32"	100 pcs/box	1501056312025



More information on materials, application, specific properties and certification can be found in chapter 10.